


「圓盤系統®」移動式施工平台組裝 步驟說明書

作業主管、組裝人員等人手壹冊參照執行



Superior Company of Taiwan

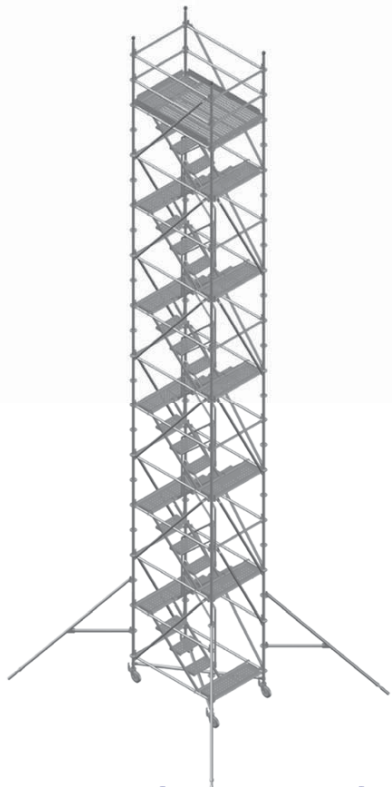

實固股份有限公司

Sucoot Co., Ltd.

地址：台中市西屯區臺灣大道四段 1836 號

TEL：(04)2359 8338 FAX：(04)2359 8480

E-Mail：sucoot@sucoot.com

<https://www.sucoot.com>



~ 版權所有 翻印必究 ~


2019/07

項次	品名 Item	規格 Specification	單重 kg/pc	H 2.5m 數量	H 3.5m 數量	H 4.5m 數量	H 5.5m 數量	H 6.5m 數量	H 7.5m 數量	H 8.5m 數量	H 9.5m 數量	H 10.5m 數量	H 11.5m 數量
1	主架	Ø48.6 x T: 2.5mm 1.0m	4.43	0	4	0	4	0	4	0	4	0	4
2	主架	Ø48.6 x T: 2.5mm 1.5m	6.31	4	4	4	4	4	4	4	4	4	4
3	主架	Ø48.6 x T: 2.5mm 2.0m	8.11	4	4	8	8	12	12	16	16	20	20
3-1	G型銷	Ø9mm(1-1/2"管用)	0.12	4	8	8	12	12	16	16	20	20	24
4	橫桿	Ø42.7 x T: 2.3mm 1.2m	3.34	6	7	8	9	10	11	12	13	14	15
5	橫桿	Ø42.7 x T: 2.3mm 1.8m	4.78	10	12	14	16	18	20	22	24	26	28
6	斜桿	Ø42.7 x T: 2.3mm 1.2 x 2.0m	6.60	1	3	4	5	6	7	8	9	10	11
7	斜桿	Ø42.7 x T: 2.3mm 1.8 x 2.0m	7.26	2	4	4	6	6	8	8	10	10	12
8-1	調整座(無補強片)	Ø38.5 x T: 4.0mm 600mmL	3.55	4	4	4	4	4	4	4	4	4	4
8-2	調整輪(黑) (含U-Clip)	8"(200mm) Height 240mm 電鍍	5.94	4	4	4	4	4	4	4	4	4	4
8-3	調整輪(白) (含U-Clip)	8"(200mm) Height 240mm 電鍍	4.30	4	4	4	4	4	4	4	4	4	4
9	迴轉平台	腳板 L: 120 x W: 400mm + 螺桿 Ø48.6 x 1.18m x 2.5	14.20	3	4	5	6	7	8	9	10	11	12
10	爬梯	W: 1.8m x H: 1.0m	14.79	2	3	4	5	6	7	8	9	10	11
11	扶手	Ø33.5 x 1.5t	4.77	1	2	3	4	5	6	7	8	9	10
12	可掀式踏板(含圓頭插銷)	W: 530 x L: 1439mm	14.75	2	2	2	2	2	2	2	2	2	2
13	定位桿	Ø48.6 x 2t 1.8 x 1.2m	5.32			2	2	2	2	2	2	2	2
14-1	調整座	Ø1-1/4" x 600mmL + HN-11B 扳手 x 2	3.90	4	4	4	4	4					
14-2	三角副架	(間距500mm) 0.92m	6.66	4	4	4	4	4					
14-3	三角斜撐架	Ø48.6 x 2t	11.79						4	4	4	4	4
15	腳趾板 1.2m	H: 120mm x 1.0 t	1.57	2	2	2	2	2	2	2	2	2	2
16	腳趾板 1.8m	H: 120mm x 1.0 t	2.45	2	2	2	2	2	2	2	2	2	2
17	工作平台高度(調整座)	Height 80-500mm		2,33-2,75m	3,33-3,75m	4,33-4,75m	5,33-5,75m	6,33-6,75m	7,33-7,75m	8,33-8,75m	9,33-9,75m	10,33-10,75m	11,33-11,75m
18	工作平台高度(煞車輪)	Height 240mm	2.49m	3.49m	4.49m	5.49m	6.49m	7.49m	8.49m	9.49m	10.49m	11.49m	
19	護欄高度	Height 1.0mm	3,33-3,75m	4,33-4,75m	5,33-5,75m	6,33-6,75m	7,33-7,75m	8,33-8,75m	9,33-9,75m	10,33-10,75m	11,33-11,75m	12,33-12,75m	
20	整組重量(調整座)		275.81	368.39	447.01	532.99	600.94	734.11	802.09	888.07	956.05	1,041.55	
21	整組重量(煞車輪、黑)	H7.5m(含)以上重量未含品項 14-1, 14-2	327.61	419.23	497.85	583.35	651.33	743.67	811.65	897.63	965.61	1,051.11	
22	整組重量(煞車輪、白)	H7.5m(含)以上重量未含品項 14-1, 14-2	321.05	413.63	492.25	578.23	646.21	737.11	805.09	891.07	959.05	1,044.55	




1. 此工作平台構件配置表，係以室內靜止使用作為標準；若使用於室外或移動時，須考慮地形、風速、震動等外來因素，另需補強其他構件或固定之。
2. 身高1.8米以上人員，進出時，請注意頭頂迴轉平台，避免碰撞。
3. 保固三年不含腳趾板、輪子、U-Clip替管、插銷等消耗品。




1.

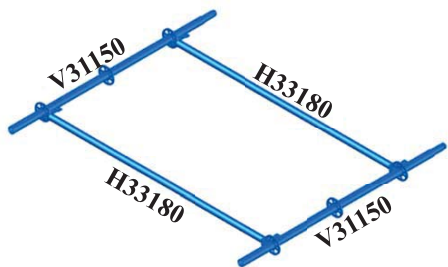


2.

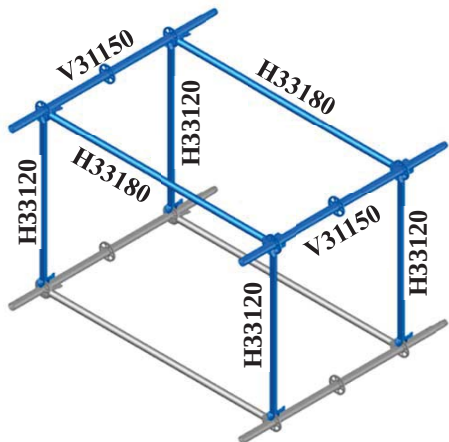


3.

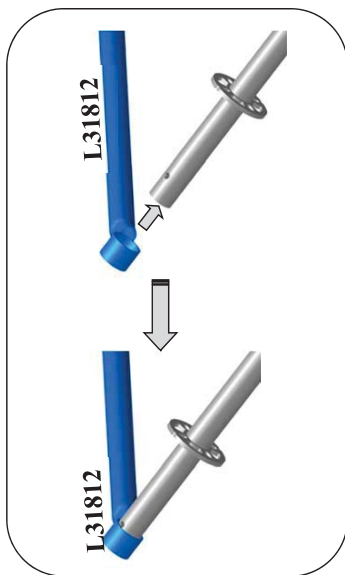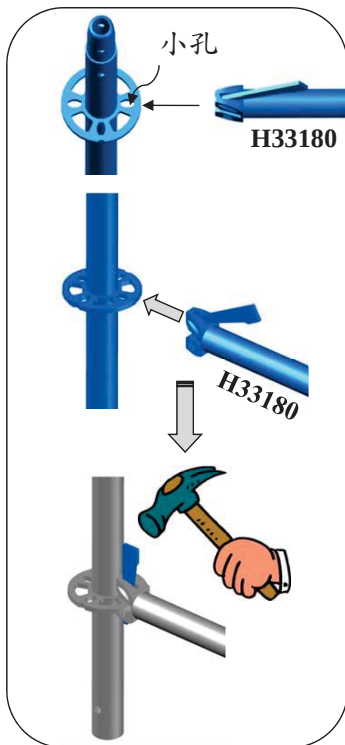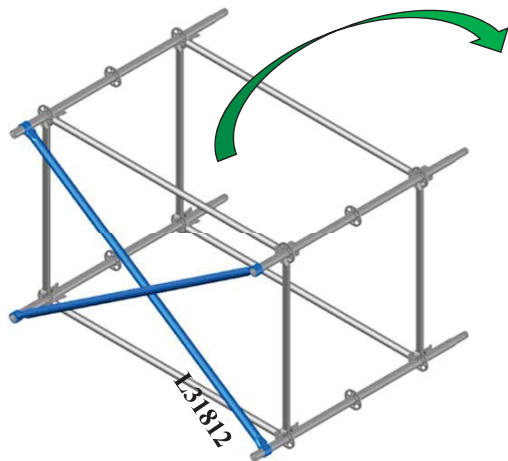


4.

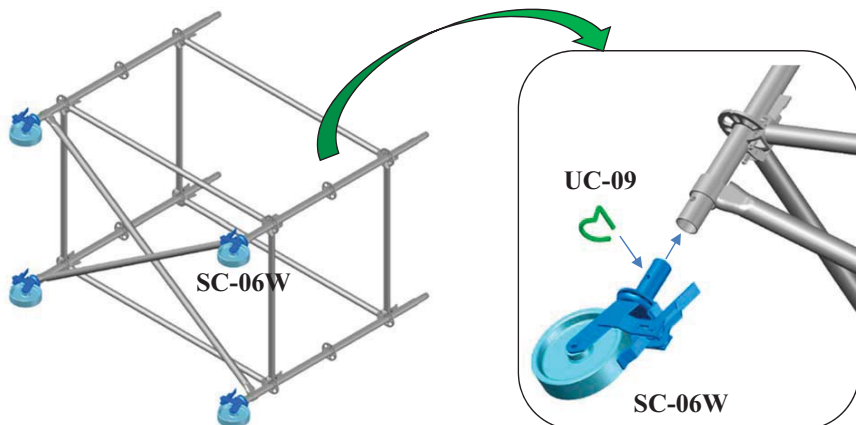



5.

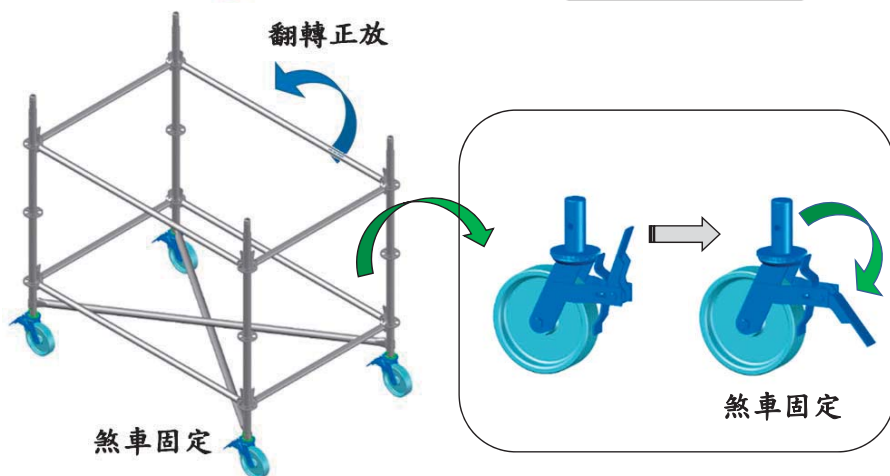

6.

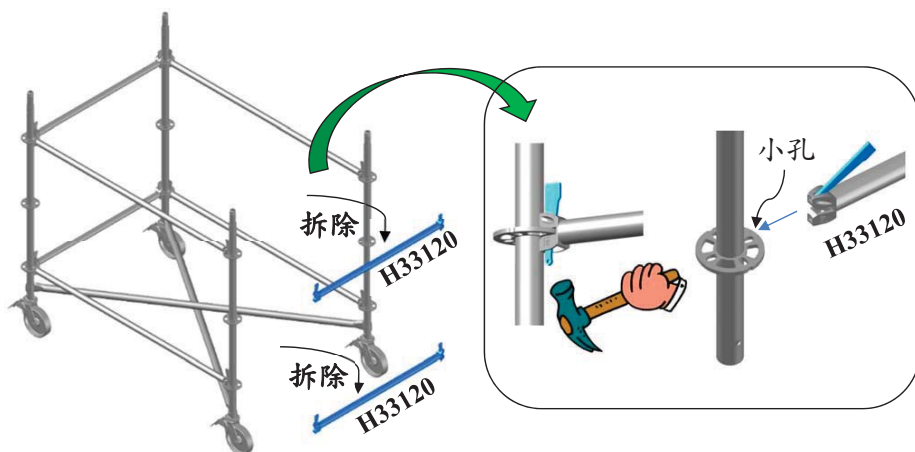



7.

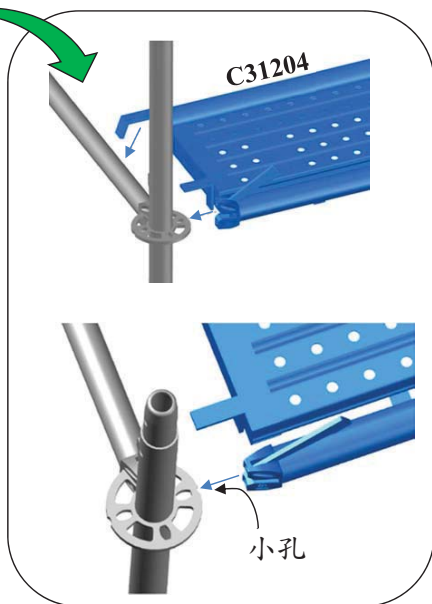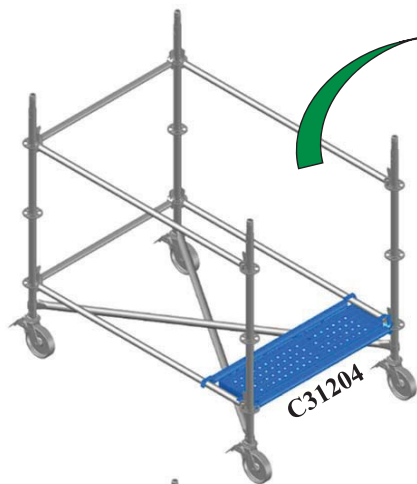


8.




9.

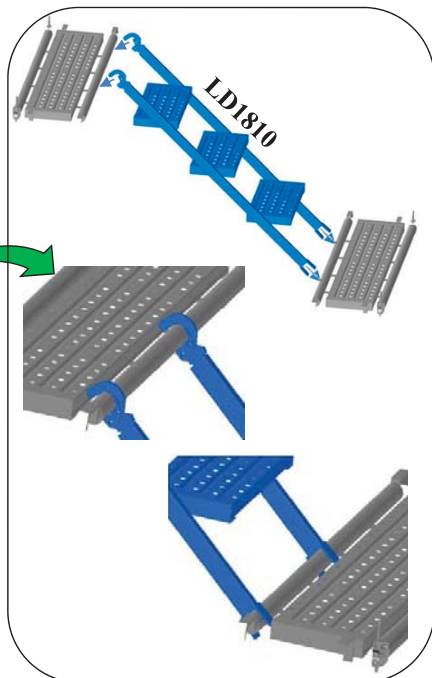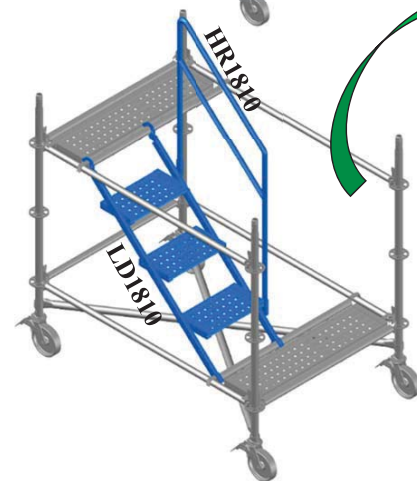



10.

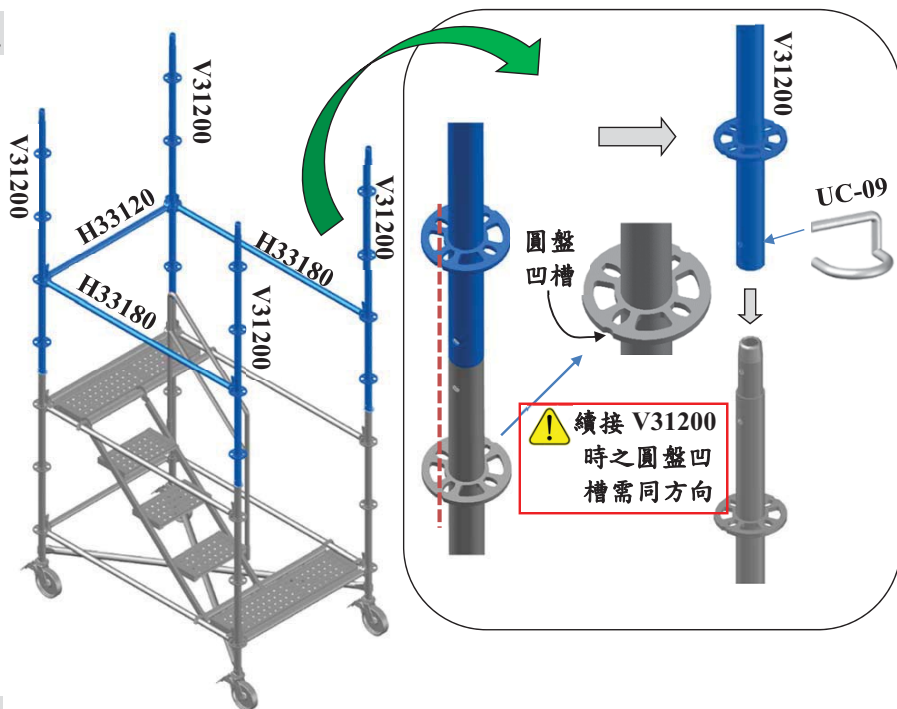



11.

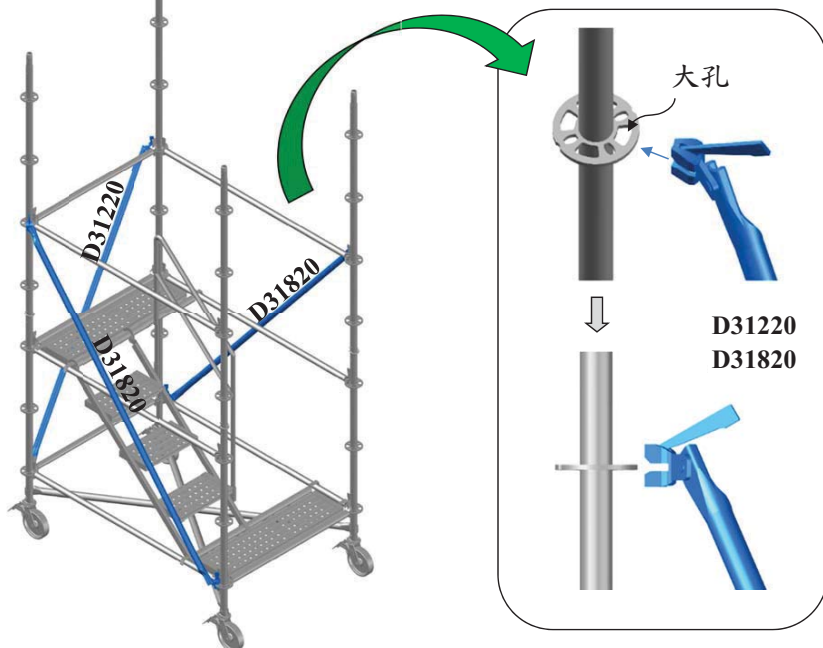


12.

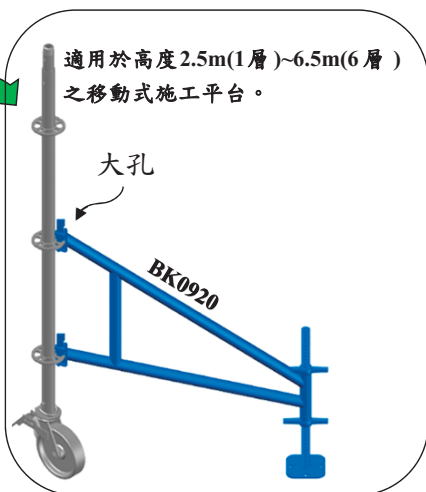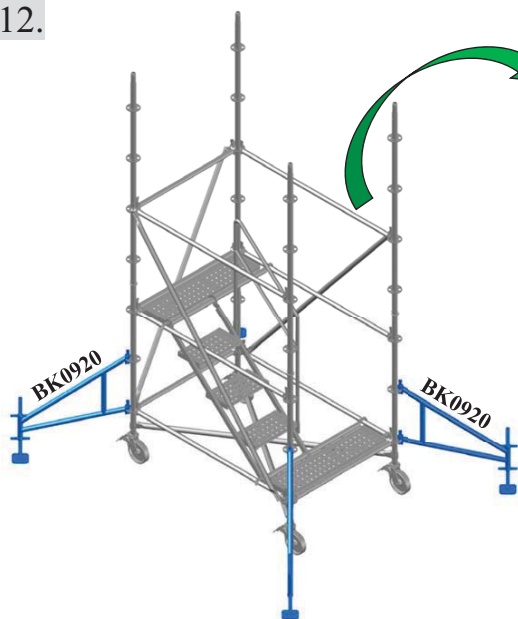


13. 依步驟 7 搭設

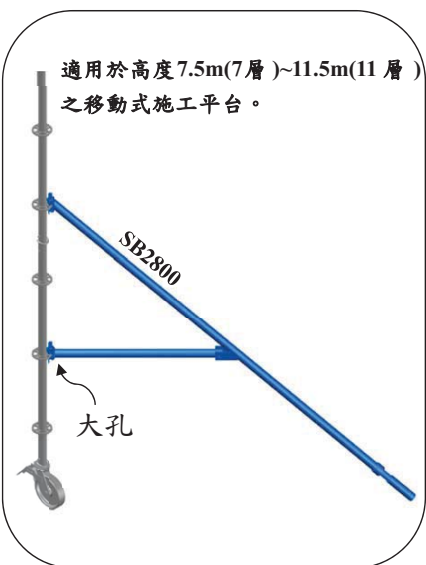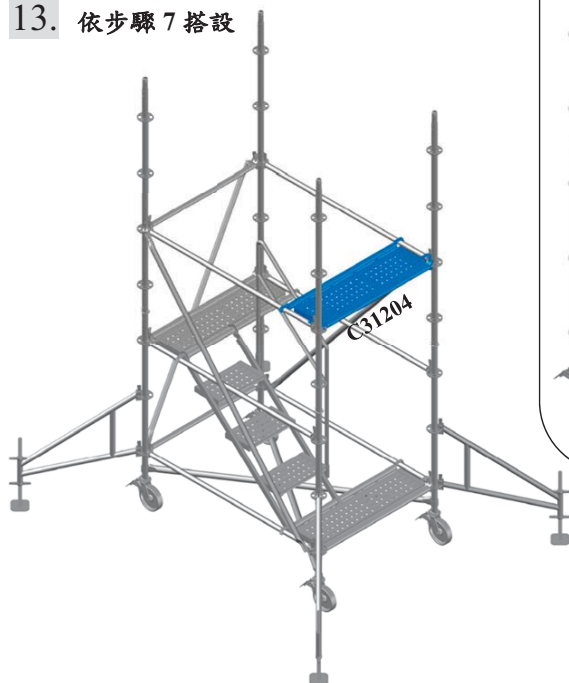


14.

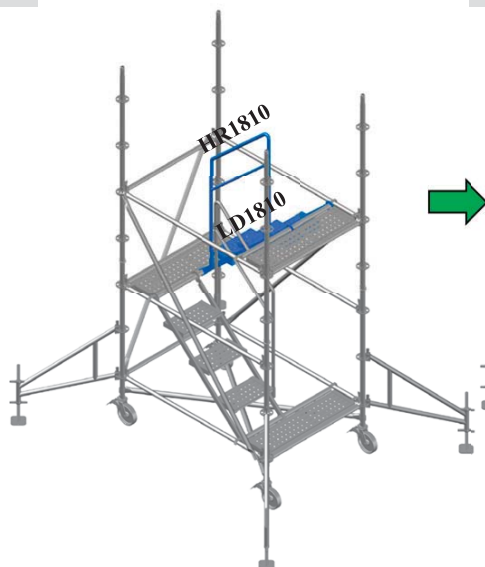


15.

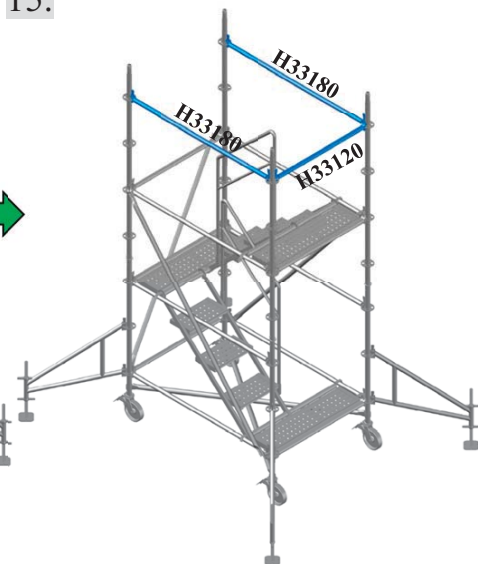


17. 組搭順序：主架→橫桿→斜桿

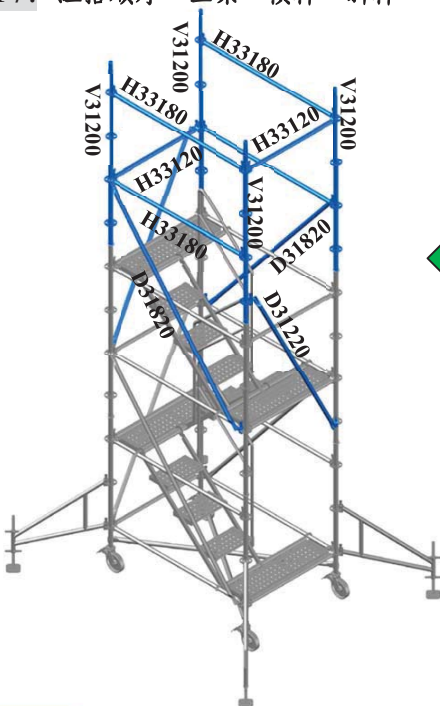

16.

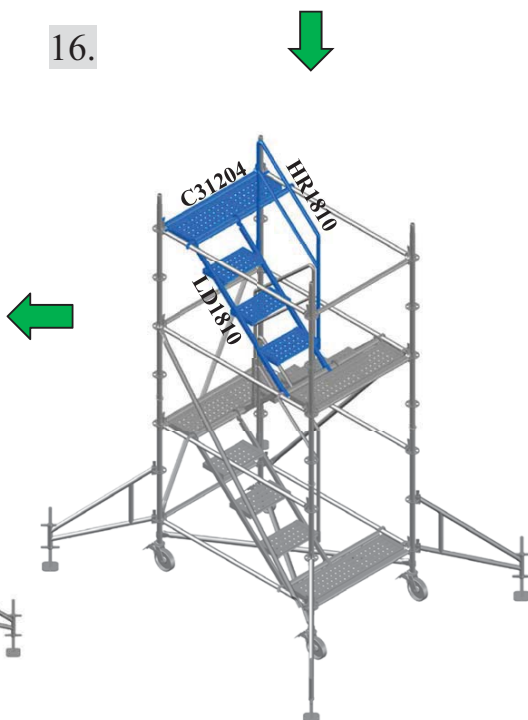


18.

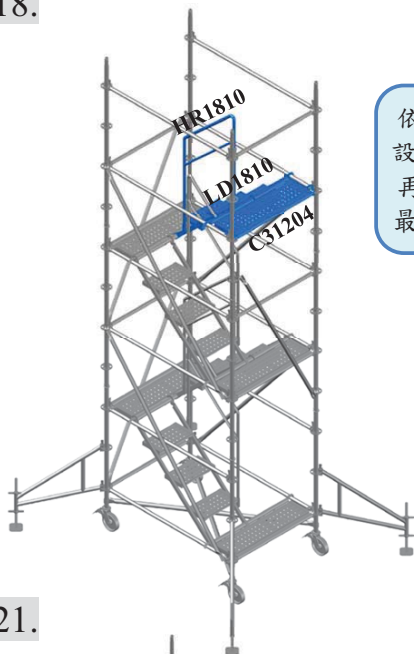


19.


依步驟 17~19 搭
設到目標層數後，
再進行步驟 20 在
最頂層組裝護欄。

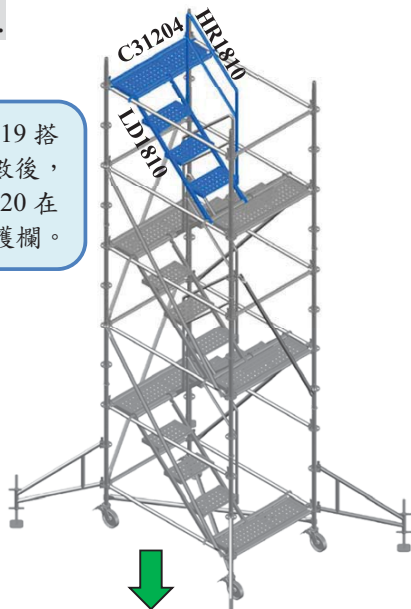



21.

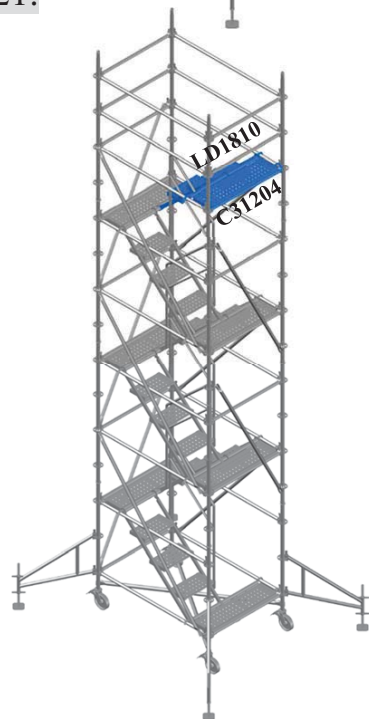



20.

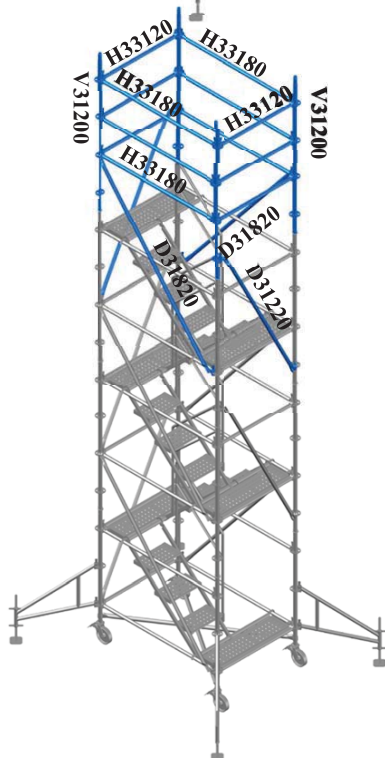


22.

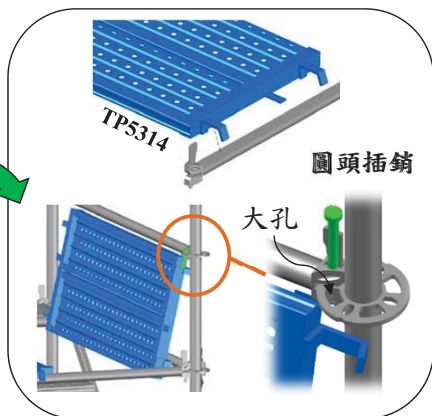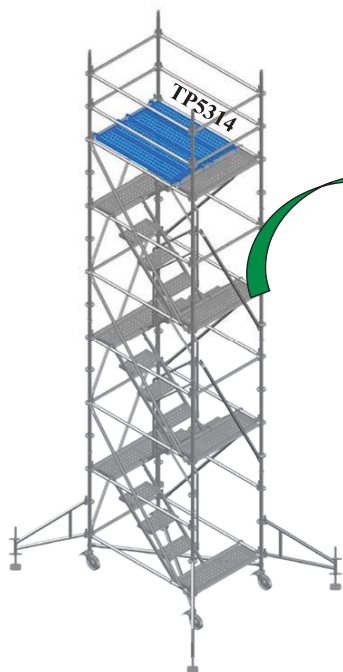

23.

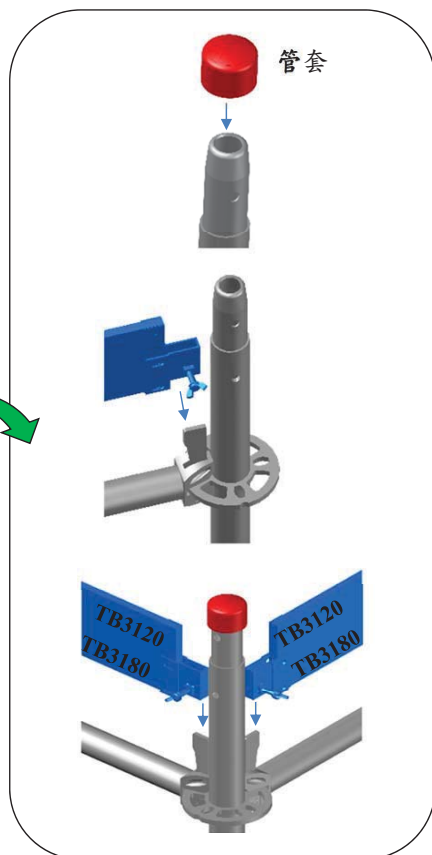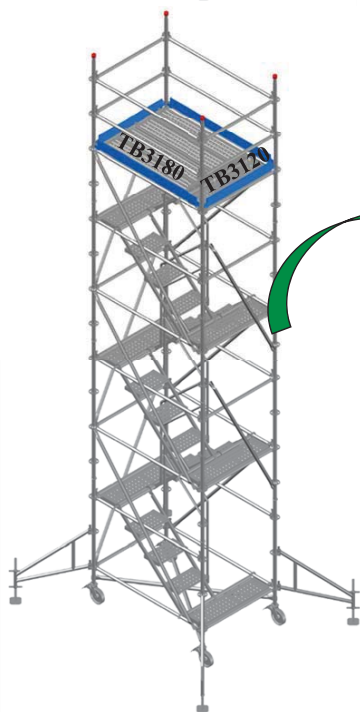

移動式工作平台高度：2.5m~11.5m

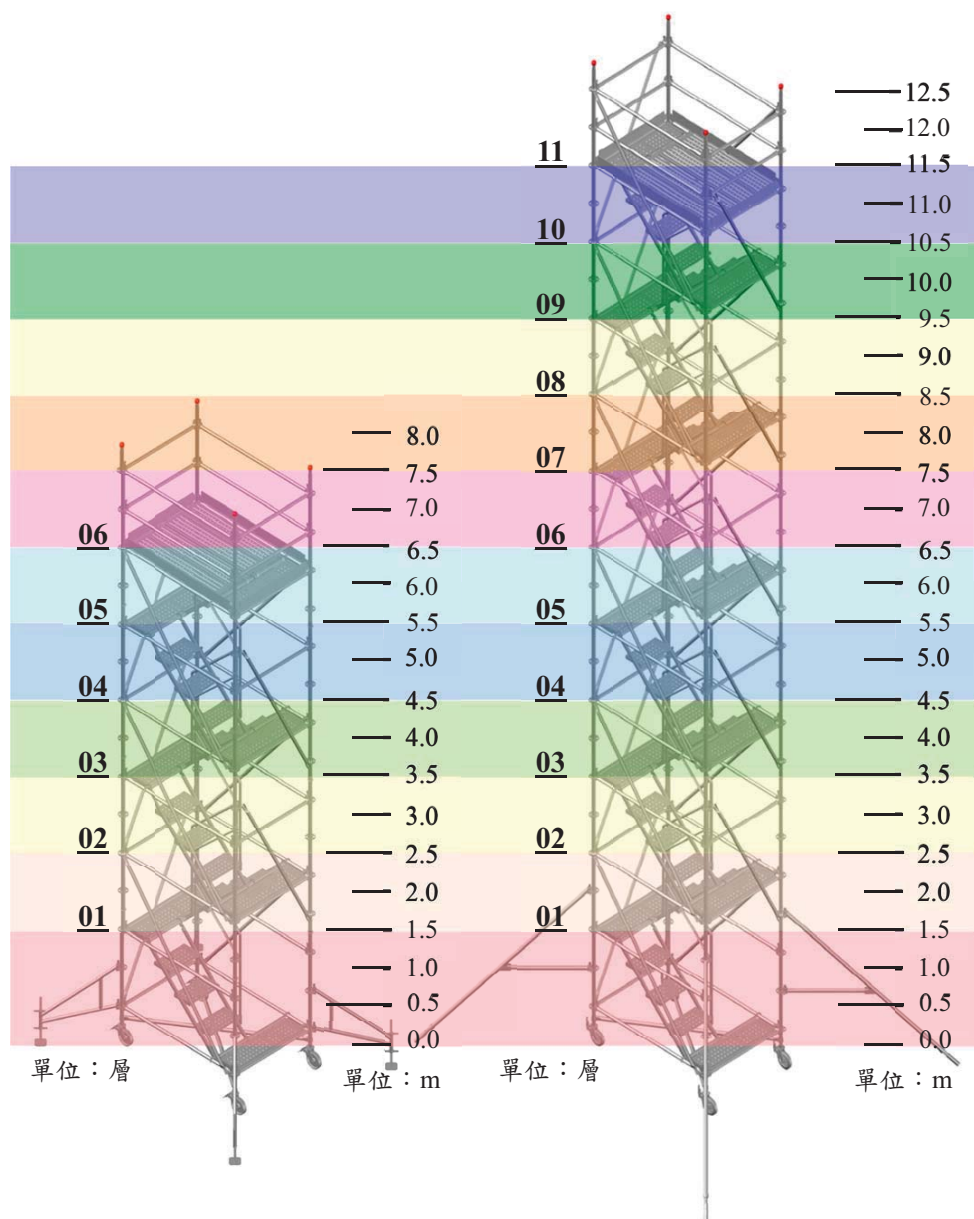



SUCCOOL



2019/07